

Anderson Greenwood Instrumentation Primary Isolation Valves

Integrally forged, one piece double block and bleed Keyblok assemblies for primary isolation of pressure take-offs, where the valve is mounted directly to the vessel or process pipe

General Application

Suitable for double block and bleed applications including pressure, level and flow measurement, sampling and chemical injection service. Instruments may be mounted directly to the valve outlet or remotely with gauge lines/impulse pipe work.

TECHNICAL DATA

Materials

CS, 316 SS, Duplex, other exotic materials

Seats:

Metal

Connections

Inlet:

ANS flanged 1/2" to 2"
API flanged to 2^{1/16}"

Outlet:


1/2" NPT

Pressure (max):

10000 psig (690 barg)

Temperature (min/max):

-313°F to 1000°F
(-192°C to 538°C)



Features

- One-piece forged body combines a compact design with strength and reduced potential leak paths compared to conventional designs.
- Flanged inlet connections available in a choice of sizes and ratings to suit each application.
- Heavy duty needle type globe valve ensures bubble-tight shut-off on venting or isolation service.
- Outside screw and yoke (OS&Y) needle type globe valve with investment cast yoke and bolted bonnet provides high mechanical strength and reliability on primary isolation service.
- Bolt-on outlet option allows choice of connections for dual instrument mounting, welded connections and chemical injection.
- Firesafe design to meet API 607, BS6755 Part 2 (optional).

F29/F33K SERIES

Anderson Greenwood Instrumentation Primary Isolation Valves

Product Overview

Keyblok F29

The F29 features two independently operable 0.2 inch (5 mm) 'HD' globe style needle valves for isolation service, with an intermediate 'HD' globe style needle valve for venting service. Metal seating is standard on valves.

Keyblok F33K


The F33K features two independently operable 0.2 inch (5 mm) bore outside screw and yoke bolted bonnet (OS&Y) valves for isolation service, with an OS&Y valve for venting service. Metal seating is standard on valves.

General Notes

Standard pressure testing to BS EN 12266-1.

Standard material traceability to EN 10204 3.1 (body only).

Material thickness to ANSI B16.34.



Valve Body - Material Codes


Description	C	L	S	D
Valve body	A105N	A350 LF2	A182 F316	A182 F51

NOTE:

1. Carbon steel valve bodies are zinc plated and passivated as standard.

F29 and F33K Series Flanged x Threaded

Size in	Rating lb	Dimensions, inches [mm]			Weight	
		A - RF	A - RTJ	B	lb	[kg]
½	150	6.3 (161)	-	3.5 (89)	7.9	(3.6)
½	300	6.3 (161)	6.4 (163)	3.8 (96)	8.6	(3.9)
½	600	6.5 (166)	6.5 (165)	3.8 (96)	8.8	(4.0)
½	900/1500	7.2 (184)	7.2 (184)	4.8 (121)	11.9	(5.4)
½	2500	7.2 (184)	7.2 (184)	5.3 (134)	15.2	(6.9)
¾	150	6.3 (161)	-	3.9 (99)	8.6	(3.9)
¾	300	6.3 (161)	6.5 (165)	4.6 (118)	10.1	(4.6)
¾	600	6.5 (166)	6.5 (165)	4.6 (118)	10.4	(4.7)
¾	900/1500	7.2 (184)	7.2 (184)	5.1 (130)	13.9	(6.3)
¾	2500	7.2 (184)	7.2 (184)	5.5 (140)	16.5	(7.5)
1	150	6.1 (156)	6.3 (161)	4.3 (108)	8.8	(4.0)
1	300	6.3 (159)	6.5 (164)	4.9 (124)	10.1	(4.6)
1	600	6.3 (159)	6.5 (166)	4.9 (124)	10.4	(4.7)
1	900/1500	6.7 (169)	7.0 (177)	5.9 (150)	15.4	(7.0)
1	2500	7.2 (183)	7.2 (183)	6.3 (159)	19.0	(8.6)
1½	150	6.3 (159)	6.5 (164)	5.0 (127)	10.1	(4.6)
1½	300	6.3 (162)	6.6 (167)	6.1 (156)	13.2	(6.0)
1½	600	6.7 (170)	6.7 (170)	6.1 (156)	14.3	(6.5)
1½	900/1500	7.1 (180)	7.1 (180)	7.0 (178)	20.7	(9.4)
1½	2500	7.6 (193)	7.6 (194)	8.0 (203)	35.1	(15.9)
2	150	6.3 (161)	6.5 (166)	6.0 (153)	14.6	(6.6)
2	300	6.5 (164)	6.7 (170)	6.5 (165)	17.6	(8.0)
2	600	6.8 (173)	6.9 (175)	6.5 (165)	18.3	(8.3)
2	900/1500	7.3 (186)	7.4 (188)	8.5 (216)	32.8	(15.0)
2	2500	7.8 (199)	7.9 (201)	9.3 (235)	48.5	(22.0)

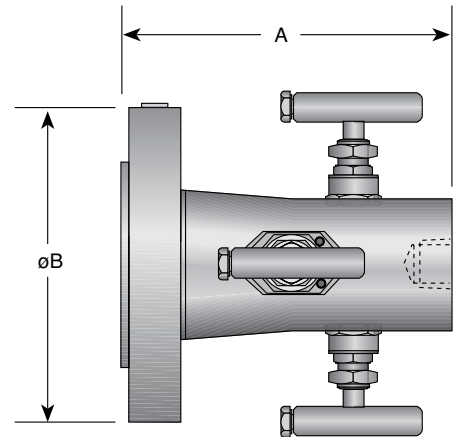


Anderson Greenwood Instrumentation Primary Isolation Valves

'HD' Needle-Type Globe Valve

The HD needle-type globe valve has a rotating stem with a free-swivel ball-end seat for repetitive bubble-tight shut-off and rolled threads for low operating torque, located above the spindle packing and isolated from the process. The stem seal is with either graphite or PTFE rings and a backseat design provides secondary stem sealing and prevents stem blowout. A body-to-bonnet metal pressure seal below the threads prevents corrosion and ensures the bonnet threads are in loaded compression for additional strength and an O-ring weather seal protects bonnet retention threads from harsh environments. An adjustable gland follower allows easy access to adjust the packing gland and the valve features a T-bar handle with locking bolt to secure it firmly on the stem.

- Pressure rating: up to 10000 psig (680 barg).
- Temperature rating: -313°F to 1000°F (-192°C to +538°C).

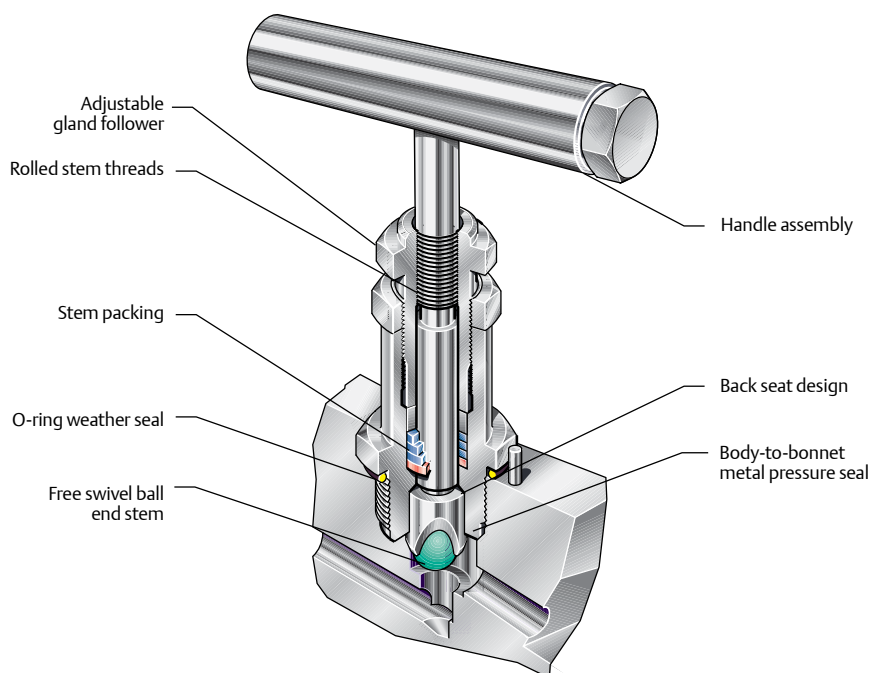


F29/F33K SERIES

Anderson Greenwood Instrumentation Primary Isolation Valves

Pressure and Temperature Ratings

'HD' Needle Type Globe Valve

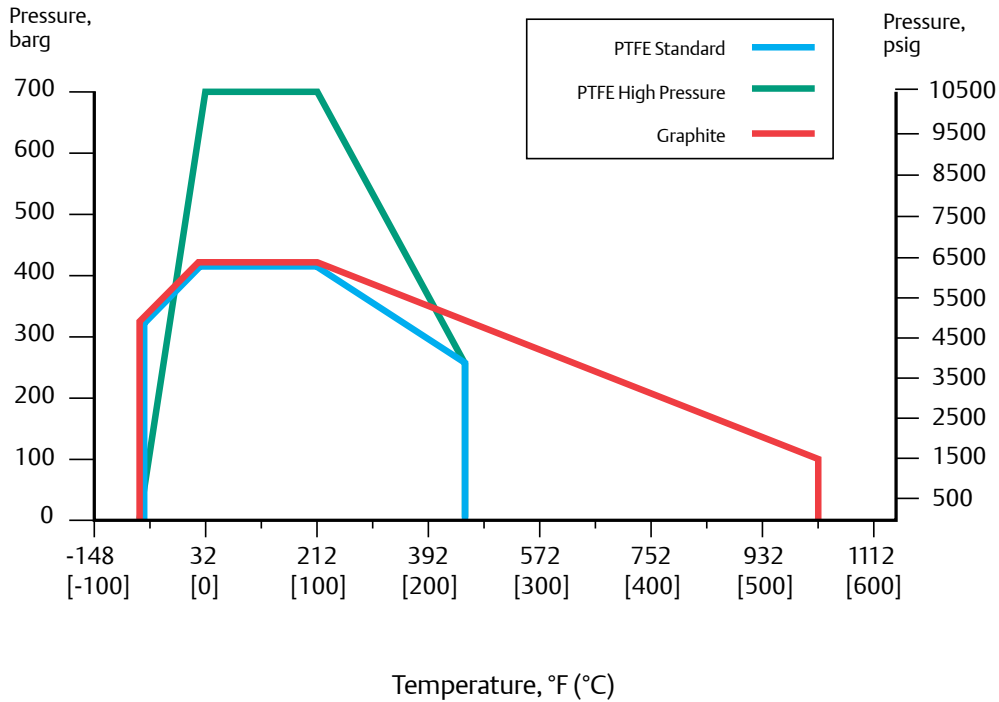

NOTE:

Min temperature for 316SS HD bonnet (-313°F (-192°C) @ 2500 psi (172 bar)

'HD' Needle Type Globe Valve Components - Trim Codes

Item	Description	S	D
1	Gland follower	Austenitic SS	A276-31803
2	Stem	A479-316	A479-31803
3	Locknut	Austenitic SS	Austenitic SS
4	Stem packing	PTFE or graphite	PTFE or graphite
5	O-ring weather seal	Buna-N Nitrile	Buna-N Nitrile
6	Ball (stem tip)	316 SS	Ceramic
7	Bonnet locking pin	Austenitic SS	Austenitic SS
8	Handle assembly	Austenitic SS	Austenitic SS

Standard Trim Combinations


Body	Trim
C	S
L	S
S	S
D	D

Anderson Greenwood Instrumentation Primary Isolation Valves

OS&Y Needle-Type Globe Valve

The OS&Y needle-type globe valve has a bolted bonnet for strength and reliability and a precision cast yoke which assures perfect stem alignment. The rotating stem has a free-swivel ball-end for repetitive bubble-tight shut-off and rolled threads to prevent galling that are completely isolated from the process with protective bellows that protect against atmospheric contamination. The stem seal is either graphite or PTFE rings and a backseat design provides secondary sealing and prevents blowout. A flange gasket ring ensures a bubble-tight body-to bonnet seal and an adjustable gland flange/follower allows easy access to the packing gland. A weather-resistant plastic bonnet cap prevents stem lubricant contamination and the valve features a T-bar handle.

- Pressure rating: up to 6000 psig (414 barg).
- Temperature rating: -313°F to 1000°F (-192°C to +538°C)

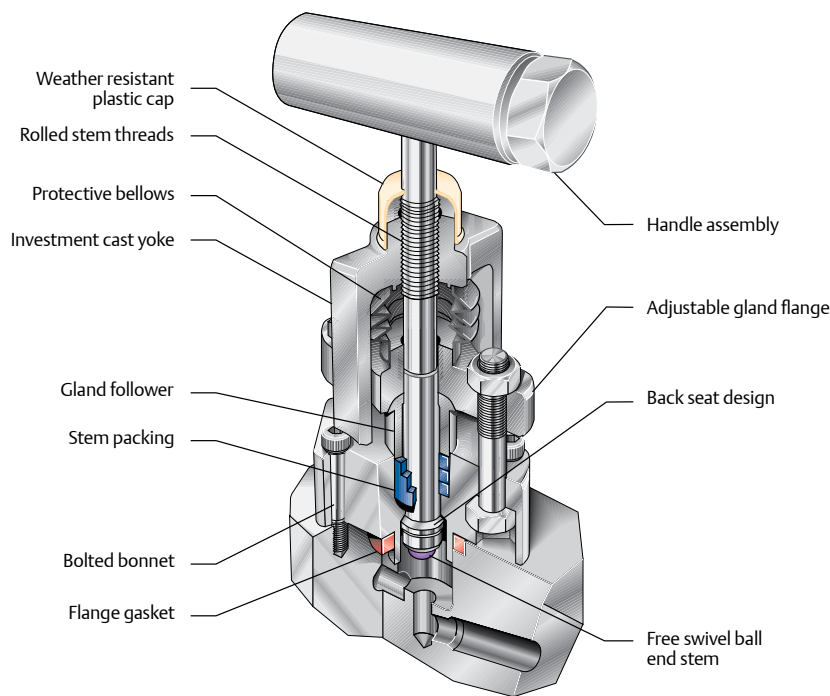


F29/F33K SERIES

Anderson Greenwood Instrumentation Primary Isolation Valves

Pressure and Temperature Ratings

OS&Y Needle Type Globe Valve

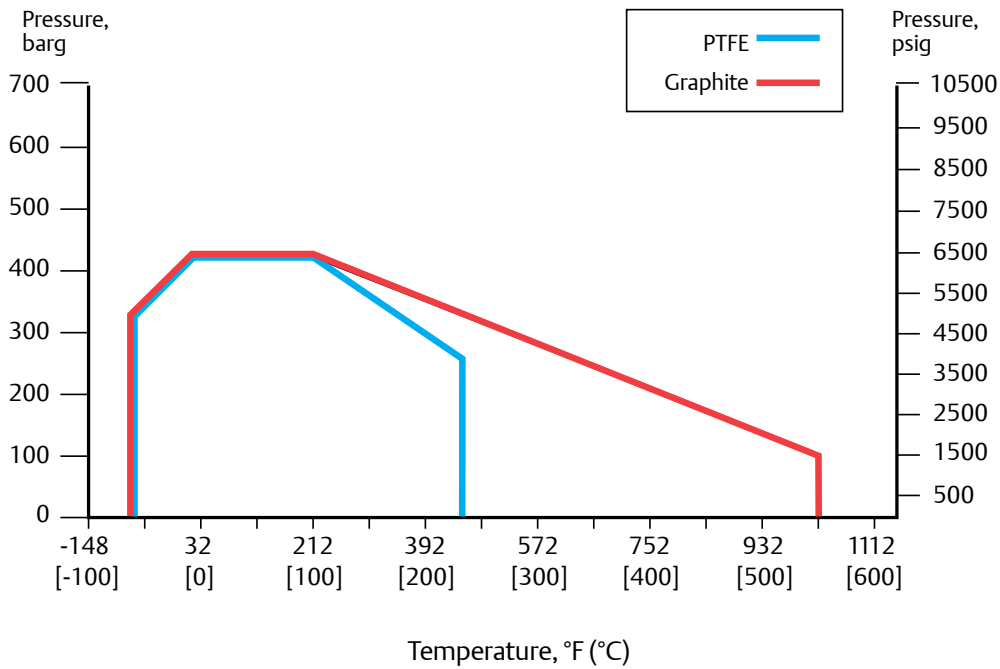

NOTE:

Min temperature for 316SS OS&Y bonnet (-313°F (-192°C) @ 2500 psi (172 bar)

'OS&Y' Needle Type Globe Valve Components - Trim Codes

Item	Description	S	D
1	Cap	Plastic	Plastic
2	Stem	A479-316	A479-31803
3	Protective bellows	Polyurethane	Polyurethane
4	Yoke	A351-CF8M	A890-4A
5	Gland follower	B783-SS-316-N2-33	A276-31803
6	Stem packing	PTFE or Graphite	PTFE or Graphite
7	Body/bonnet - bolts	ASTM A453	ASTM A453
8	Flange gasket	Graphite	Graphite
9	Ball (stem tip)	316 SS	Ceramic
10	Gland flange - bolts	Austenetic SS	Austenetic SS
11	Handle assembly	Austenetic SS	Austenetic SS
12	Gland flange	A351 CF8M	A351 CF8M

Anderson Greenwood Instrumentation Primary Isolation Valves

Selection Guide

F29		V	S	S	061L					
BASIC SERIES		NEEDLE VALVE PACKING	BODY MATERIAL	TRIM MATERIAL	INLET CONNECTION					
Globe needle valve type										
F29	Flanged x threaded double block and bleed	V PTFE	C A105N	S 316 SS	04	1/2"	1	RF	A	150 lb (ANSI B16.5)
F291	Flanged x threaded double block and bleed - 10000 psi (PTFE packed)	H Graphite	L A350 LF2	D Duplex UNS S31803	06	3/4"	3	RTJ	J	300 lb (ANSI B16.5)
F33K	Flanged x threaded double block and bleed		S A182 F316		08	1"	4	BX	K	600 lb (ANSI B16.5)
			D A182 F51		12	1 1/2"	5	RX	T	900 lb (ANSI B16.5)
					16	2"	6	R	L	1500 lb (ANSI B16.5)
					17	1 13/16"	8	Hub	M	2500 lb (ANSI B16.5)
					18	2 1/16"			N	5000 lb (API 6A)
	24	3"			P	10000 lb (API 6A)				
								V	3000 lb (API 6A)	

Standard trim combinations
 C, L and S Body = S Trim,
 D body = D Trim

047B

QV

OUTLET CONNECTION				OPTIONS			
04	1/2"	2	Male	B	NPT	MP04	Multiport outlet 1/2" NPT
06	3/4"	7	Female	C	Butt weld (XXS)	ICV	Integral check valve (injection)
08	1"			D	Socket weld (XXS)	KFGTX	Kidney flange adaptor
				E	G 1/2"	IQ(--)	Integral quill (required length)
						PV	Plugged vent
						LH	Lockable ball valve handles (specify number required)
						AT	Anti-tamper (HD type only)
						SG	NACE MR0175 latest revision
						LAT	Lockable tamper-proof bonnet (HD type).
						PD	Padlock for - LAT
						QV	1/4" NPT (f) Vent
						PO	Plugged outlet
						SS	Full 316 SS trim
						VO	Vent option (please specify compression fittings, if required)
						CB	Ceramic ball tip
						ST	Stellite ball tip
						LT	Low Temperature for integral seat 316SS -313°F (-192°C) @ 2500 psi (172 bar)